




ObriaTM

Made for Every Day



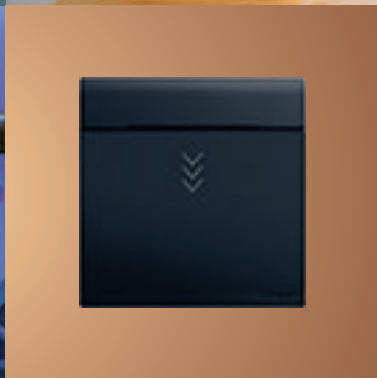

04-05

Made for
Distinction



06-07

Made for
Harmony



08-09

Made for
Versatility



10-11

Made for
Hospitality

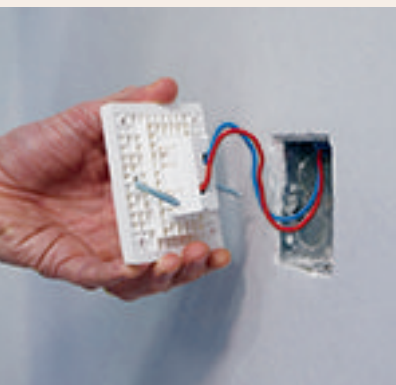

12-13

Made for
Efficiency





14 onwards

Catalogue
Pages



Made for Every Day

Work, live, and play. When every day is a flurry of activities in different spaces, **Obria™** can be the constant that synergistically connects every space – for working, living and playing. **Obria™** is made for every day.

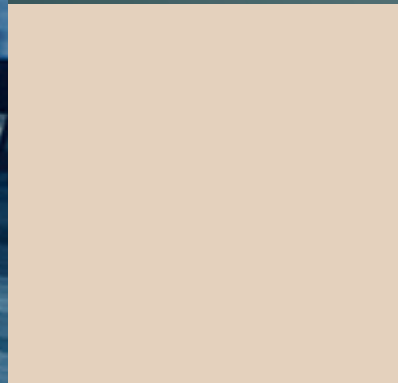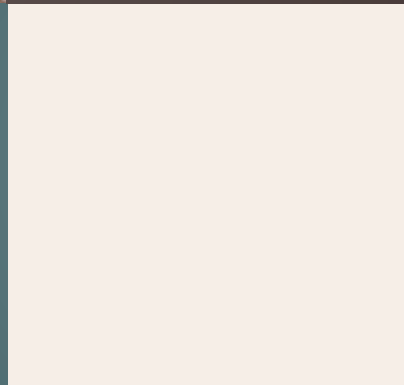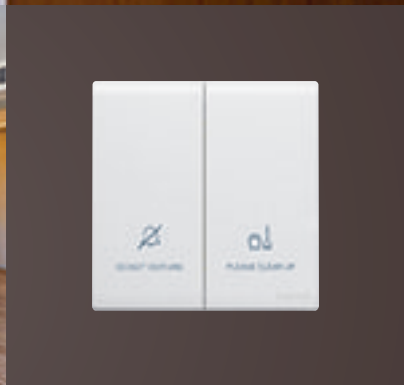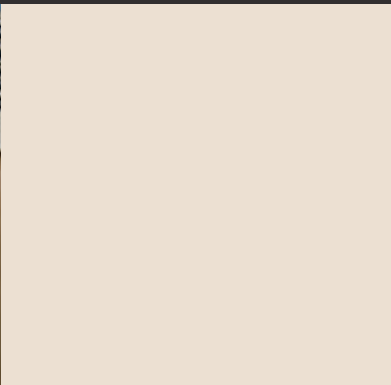

Made for Distinction

Less is more. That is why there is nothing simple about the design of **Obria™** – from the front view to the side profile. Every detail down to the curvature of the plate is designed to exude unique, understated style and modernity. You can't go wrong with **Obria™**.

Minimalist aesthetics –
no frame and full plate



Borderless rocker

The vertical curved borderless switch rocker is smooth to the touch and optimum for natural operation.





Elegant profile
– slim and
clean lines



Curved Plate

The slightly curved plate goes hand in hand with the slim profile.

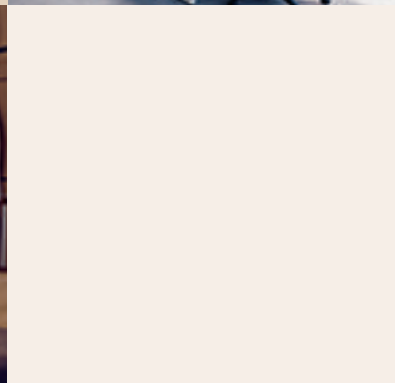



An attractive range –
classic and modern all at once


Made for Harmony

Style is personal. There is no reason to settle for less or follow the crowd. Every style should be celebrated. With **Obria™**, colours are kept neutral so that **Obria™** blends right in whether you are going for strong contrasting colours or soothing harmonious tones. You have the final say.




Healthy Assortment

Available in four colours from 1-gang to 4-gang, **Obria™** switches offer many possibilities.




Black



White



Champagne



Dark Silver

Made for Versatility

In life, there's only room for the things that matter. **Obria™** is the perfect illustration, always versatile, always ready to meet every need for every use case in every space - in the home, at the office, working from home, or in a hotel room.

1-gang British Standard socket with USB Type-C fast charge feature (Power Delivery)



Fast-charging power delivery reduces charging time




Optimum voltage supply to avoid overcharging



Cuts off power delivery upon full charge for more efficient energy consumption



Maximises battery lifespan and user safety

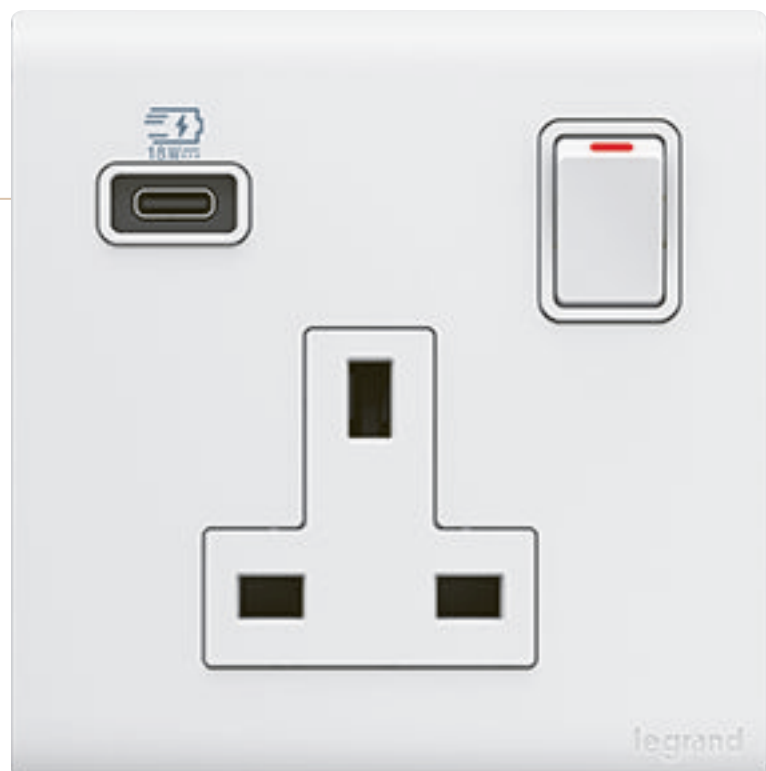



1-gang HDMI Type-A socket
+ USB Type-A data socket



5-speed fan control



1-gang RJ45 Cat. 6 UTP
+ TV "F" type socket



1-gang British Standard 13A socket with
USB Type-C charger and IP55 cover

Made for Hospitality

There is no place like home. Nothing is more comforting than familiarity in a new environment. Equipped with essential functions tailored for hospitality projects, **Obria™** ensures that every guest feels at home – even when they are a thousand miles away from home.



DND/MUR indicator + doorbell



DND/MUR guest room control



2-gang British Standard socket with USB Type-A & Type-C fast charge feature (Power Delivery)



Adaptor for Arteor mechanism



Electronic room thermostat

More Functions


For complex hospitality projects that call for added functions, **Obria™** works seamlessly with the Arteor adapter to offer more.



Double USB Type-C charger 30W Fast charge



Key card switch

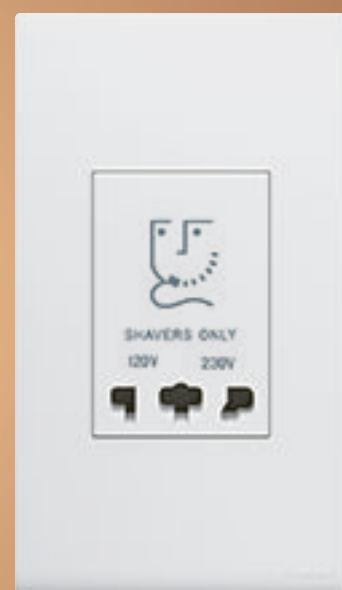

Shaver socket



Time Saving

Large terminal capacity allows for quick and easy wiring.



Robustness

The one-piece structure of the base and support, combined with the ribbed pattern, makes the switch strong and sturdy.

Made for Efficiency

Timely completion and quality delivery – totally possible with **Obria™**. Made for quick and easy installation regardless of site condition or installer experience, **Obria™** is every project manager's dream come true. When you choose **Obria™**, you choose productivity every day.



Universal Screw Heads

Only one screwdriver head is necessary for both wiring and adjusting **Obria™** during the installation.

Easy Adjustment

Oblong shaped holes make adjustment fuss-free when the switch is not straight.



Safe and Fast Installation

No access to metal parts during installation combined with the one-piece plate/mechanism means installation can be completed in three simple steps.



Ordering Made Simple

1 catalogue number =
1 complete product



MEC21001BL



MEC22006CH



MEC22009SL



MEC22011WH

Conform to BS EN 60669-1
 Compact mechanism for greater wiring space
 Dimensions: 86 x 86 mm
 Supplied with 2 screws M 3.5 for BS boxes
 Supplied as complete product with protective film

Pack	Cat.Nos	Single pole switches 16 AX - 250 V~
10	MEC21001WH	1-gang 1-way switch <ul style="list-style-type: none"> ○ White ● Dark Silver ● Champagne ● Black
10	MEC21001SL	
10	MEC21001CH	
10	MEC21001BL	
10	MEC22002WH	1-gang 2-way switch <ul style="list-style-type: none"> ○ White ● Dark Silver ● Champagne ● Black
10	MEC22002SL	
10	MEC22002CH	
10	MEC22002BL	
10	MEC21003WH	1-gang - intermediate switch <ul style="list-style-type: none"> ○ White ● Dark Silver ● Champagne ● Black
10	MEC21003SL	
10	MEC21003CH	
10	MEC21003BL	
10	MEC21005WH	2-gang 1-way switch <ul style="list-style-type: none"> ○ White ● Dark Silver ● Champagne ● Black
10	MEC21005SL	
10	MEC21005CH	
10	MEC21005BL	
10	MEC22006WH	2-gang 2-way switch <ul style="list-style-type: none"> ○ White ● Dark Silver ● Champagne ● Black
10	MEC22006SL	
10	MEC22006CH	
10	MEC22006BL	
10	MEC21008WH	3-gang 1-way switch <ul style="list-style-type: none"> ○ White ● Dark Silver ● Champagne ● Black
10	MEC21008SL	
10	MEC21008CH	
10	MEC21008BL	

Pack	Cat.Nos	Single pole switches 16 AX - 250 V~ (continued)
10	MEC22009WH	3-gang 2-way switch <ul style="list-style-type: none"> ○ White ● Dark Silver ● Champagne ● Black
10	MEC22009SL	
10	MEC22009CH	
10	MEC22009BL	
10	MEC21010WH	4-gang 1-way switch <ul style="list-style-type: none"> ○ White ● Dark Silver ● Champagne ● Black
10	MEC21010SL	
10	MEC21010CH	
10	MEC21010BL	
10	MEC22011WH	4-gang 2-way switch <ul style="list-style-type: none"> ○ White ● Dark Silver ● Champagne ● Black
10	MEC22011SL	
10	MEC22011CH	
10	MEC22011BL	

Obria™

double pole switches



MEC21024WH



MEC21025SL



MEC21029CH



MEC21030BL

Conform to BS EN 60669-1

Compact mechanism for greater wiring space

Dimensions: 86 x 86 mm (1-gang) / 86 x 146 mm (2-gang)

Supplied with 2 screws M 3.5 for BS boxes

Supplied as complete product with protective film

Pack	Cat.Nos	Double pole switches 20 AX - 250 V~
		Equipped with earth link connector
		1-gang 1-way switch with RED neon indicator
10	MEC21084WH	○ White
10	MEC21084SL	● Dark Silver
10	MEC21084CH	● Champagne
10	MEC21084BL	● Black
		2-gang 1-way switch with RED neon indicator and earth terminal
10	MEC21087WH	○ White
10	MEC21087SL	● Dark Silver
10	MEC21087CH	● Champagne
10	MEC21087BL	● Black
		1-gang 1-way switch with LED indicator and earth connection
10	MEC21024WH	○ White
10	MEC21024SL	● Dark Silver
10	MEC21024CH	● Champagne
10	MEC21024BL	● Black
		1-gang 1-way switch with red LED power indicator and "WATER HEATER" marking
10	MEC21025WH	○ White
10	MEC21025SL	● Dark Silver
10	MEC21025CH	● Champagne
10	MEC21025BL	● Black
		1-gang 2-way switch with red LED power indicator and "WATER HEATER" marking
10	MEC22026WH	○ White
10	MEC22026SL	● Dark Silver
10	MEC22026CH	● Champagne
10	MEC22026BL	● Black

Pack	Cat.Nos	Double pole switches 32 A - 250 V~
		1-gang 1-way switch with red LED indicator
5	MEC21027WH	○ White
5	MEC21027SL	● Dark Silver
5	MEC21027CH	● Champagne
5	MEC21027BL	● Black
		Double pole switches 45 A - 250 V~
		1-gang 1-way switch with red LED indicator
5	MEC21029WH	○ White
5	MEC21029SL	● Dark Silver
5	MEC21029CH	● Champagne
5	MEC21029BL	● Black
		2-gang 1-way vertical switch with red LED indicator and red button
5	MEC21030WH	○ White
5	MEC21030SL	● Dark Silver
5	MEC21030CH	● Champagne
5	MEC21030BL	● Black

Obria™

push-buttons



Obria™

dimmers and bleeder



MEC23004SL



MEC23023WH

Dimensions: 86 x 86 mm
Compact mechanism for greater wiring space
Supplied with 2 screws M 3.5 for BS boxes
Supplied as complete product with protective film

Pack	Cat.Nos	Push-buttons 10 A - 250 V~
		Conform to BS EN 60669-1
		1-gang
10	MEC23004WH	○ White
10	MEC23004SL	● Dark Silver
10	MEC23004CH	● Champagne
10	MEC23004BL	● Black
		1-gang with bell symbol
10	MEC23023WH	○ White
10	MEC23023SL	● Dark Silver
10	MEC23023CH	● Champagne
10	MEC23023BL	● Black
		2-gang
10	MEC23022WH	○ White
10	MEC23022SL	● Dark Silver
10	MEC23022BL	● Black



MEC24073CH



MEC24012BL

Dimensions: 86 x 86 mm
Supplied with 2 screws M 3.5 for BS boxes
Supplied as complete product with protective film

Pack	Cat.Nos	Dimmers
		300 W rotary dimmer without neutral
		Conform to BS EN 60669-2-1
		For all types of lamps :
		- Dimmable LEDs: 5 to 75 W (Leading); 5 to 200 W (Trailing)
		- Incandescent and halogen lamps: 5 to 300 W
		- Dimmable compact fluorescent lamps: 5 to 75 W
		- Halogen lamps with ferromagnetic or electronic transformer: 5 to 300 VA
		- Fluorescent tube with integrated electronic ballast: 5 to 300 VA
		Standby onsumption: 0.85 W
1	MEC24073WH	○ White
1	MEC24073SL	● Dark Silver
1	MEC24073CH	● Champagne
1	MEC24073BL	● Black
		40-400W incandescent dimmer 230V
		Conform to BS EN 60669-2-1
1	MEC24012WH	○ White
1	MEC24012SL	● Dark Silver
1	MEC24012CH	● Champagne
1	MEC24012BL	● Black
		Active Power Bleeder
1	0 401 49	Makes 2-wire electronic lighting control units without neutral compatible with all commercially-available loads (LED, compact fluorescent, ELV halogen with ferromagnetic or electronic ballast, 230 V halogen, fluorescent tube, incandescent) Consumption: 0.4 W

Obria™

fan controls, cooker control units and panic buttons



Obria™

telephone and data sockets






MEC66014CH



MEC73031SL

Dimensions: 86 x 86 mm (1-gang) / 146 x 86 mm (2-gang)
Supplied with 2 screws M 3.5 for BS boxes
Supplied as complete product with protective film

Pack	Cat.Nos	Fan speed controls
		Conform to BS EN 60669-2-1
		5-speed fan controls 100 W for fan with overall diameter 48"
1	MEC66014WH	 ○ White
1	MEC66014SL	● Dark Silver
1	MEC66014CH	● Champagne
1	MEC66014BL	● Black
		Cooker control units 45 A - 250 VA
		Conform to BS 4177
		45 A DP switch + 13 A switched socket outlet with red indicator
5	MEC73031WH	 ○ White
5	MEC73031SL	● Dark Silver
5	MEC73031CH	● Champagne
5	MEC73031BL	● Black
		Panic buttons
		1 A resistive - 250 VA
1	MEC23013WH	 ○ White
1	MEC23013SL	● Dark Silver
1	MEC23013CH	● Champagne
1	MEC23013BL	● Black







MEC42017CH



MEC43068BL

Dimensions: 86 x 86 mm
Compact mechanism for greater wiring space
Supplied with 2 screws M 3.5 for BS boxes
Supplied as complete product with protective film

Pack	Cat.Nos	Telephone sockets
		RJ 11 sockets - 4 contacts 1/4 turn, tool-less connector
10	MEC42017WH	 ○ White
10	MEC42017SL	● Dark Silver
10	MEC42017CH	● Champagne
10	MEC42017BL	● Black
		Double RJ 11 sockets - 4 contacts 1/4 turn, tool-less connector
10	MEC42070WH	 ○ White
10	MEC42070SL	● Dark Silver
10	MEC42070CH	● Champagne
10	MEC42070BL	● Black
		Data sockets
		Compliant with ISO/IEC 11-801, EN 50173 and ANSI/TIA 568 standards
		RJ 45 Cat. 6 STP
10	MEC43018WH	 ○ White
10	MEC43018SL	● Dark Silver
10	MEC43018CH	● Champagne
10	MEC43018BL	● Black
		Double RJ 45 Cat. 6 UTP
10	MEC43068WH	 ○ White
10	MEC43068SL	● Dark Silver
10	MEC43068CH	● Champagne
10	MEC43068BL	● Black



MEC41067WH



MEC41021CH



MEC49071BL



MEC44015BL

Dimensions: 86 x 86 mm
 Supplied with 2 screws M 3.5 for BS boxes
 Supplied as complete product with protective film

Pack	Cat.Nos	Multiple entries television sockets
		For DVBT, cable cast and satellite installation (with individual demodulator) DVBT HDTV compatible TV: male connector (Ø9.5 mm) R: female connector (Ø9.5 mm) SAT: "F" type connector Recommended coaxial cable 17 VATC
		TV-R-SAT sockets - star attenuation < 1.5 dB Conform to EN 50083-2 and European directive TV: 5-68/120-862 MHz R: 87.5-108 MHz FM / 174-223 MHz DAB+ SAT: 550-2400 MHz Installation recommended in flush-mounting box depth 40 mm
10	MEC41067WH	<ul style="list-style-type: none"> ○ White ● Dark Silver ● Champagne ● Black
10	MEC41067SL	
10	MEC41067CH	
10	MEC41067BL	

		Single television sockets For DVBT, cable cast and satellite installation (with individual demodulator) DVBT HDTV compatible TV: male connector (Ø9.5 mm) R: female connector (Ø9.5 mm) SAT: "F" type connector
		Female TV sockets - star attenuation < 1 dB TV: 0-2400 MHz Installation recommended in flush-mounting box depth 40 mm
10	MEC41021WH	<ul style="list-style-type: none"> ○ White ● Dark Silver ● Champagne ● Black
10	MEC41021SL	
10	MEC41021CH	
10	MEC41021BL	
		TV sockets "F" type with screws - star attenuation < 1 dB SAT: 0-2400 MHz
10	MEC41066WH	<ul style="list-style-type: none"> ○ White ● Dark Silver ● Champagne ● Black
10	MEC41066SL	
10	MEC41066CH	
10	MEC41066BL	
		Female TV sockets + RJ 45 cat. 6 UTP sockets
10	MEC49020WH	<ul style="list-style-type: none"> ○ White ● Dark Silver ● Champagne ● Black
10	MEC49020SL	
10	MEC49020CH	
10	MEC49020BL	

Pack	Cat.Nos
10	MEC49071WH
10	MEC49071SL
10	MEC49071CH
10	MEC49071BL
10	MEC41069WH
10	MEC41069SL
10	MEC41069CH
10	MEC41069BL
10	MEC44015WH
10	MEC44015SL
10	MEC44015CH
10	MEC44015BL

Single television sockets (continued)
TV "F" type + RJ 45 cat. 6 UTP

- White
- Dark Silver
- Champagne
- Black

Double female TV sockets + "F" type

- White
- Dark Silver
- Champagne
- Black

Audio and video sockets
HDMI Type-A sockets + USB Type-A data sockets

Used to bring connections closer to the users and to transmit high-definition digital audio video streams between a source (Blu-Ray player, computer) and a compatible receiver (e.g. TV, videoprojector) and with connecting USB devices (interactive white board, scanner-printer, external hard disk)

- White
- Dark Silver
- Champagne
- Black

Obria™

British standard socket outlets



Obria™ - British standard socket outlets
with USB charger and microswitch



MEC32034WH



MEC32036BL

Dimensions: 86 x 86 mm (1-gang) / 146 x 86 mm (2-gang)
Supplied with 2 screws M 3.5 for BS boxes
Supplied as complete product with protective film
All sockets integrate child protection

Pack	Cat.Nos	British standard single pole socket outlets 13 A - 250 V~
		Conform to BS 1363-2
		1-gang - unswitched
10	MEC31032WH	○ White
10	MEC31032SL	● Dark Silver
10	MEC31032CH	● Champagne
10	MEC31032BL	● Black
		1-gang - switched
10	MEC32034WH	○ White
10	MEC32034SL	● Dark Silver
10	MEC32034CH	● Champagne
10	MEC32034BL	● Black
		1-gang - switched with red LED power indicator
10	MEC32035WH	○ White
10	MEC32035SL	● Dark Silver
10	MEC32035CH	● Champagne
10	MEC32035BL	● Black
		2-gang - switched
5	MEC32036WH	○ White
5	MEC32036SL	● Dark Silver
5	MEC32036CH	● Champagne
5	MEC32036BL	● Black

Pack	Cat.Nos	British standard double pole socket outlets 13 A - 250 V~
		Conform to BS 1363-2
		1-gang - switched
10	MEC32038WH	○ White
10	MEC32038SL	● Dark Silver
10	MEC32038CH	● Champagne
10	MEC32038BL	● Black



MEC33093WH



MEC33090SL

Dimensions: 86 x 86 mm
Supplied with 2 screws M 3.5 for BS boxes
Supplied as complete product with protective film
All sockets integrate child protection

Pack	Cat.Nos	British standard socket outlets 13 A - 250 V~ with USB charger
		Conform to BS 1363-2 USB charger conform to BS EN 62368-1 Consumption in passive mode < 0.08 W
		1-gang single pole switched with USB Type-A - 3 A - 5 V~ - 15 W
1	MEC33078WH	○ White
1	MEC33078SL	● Dark Silver
1	MEC33078CH	● Champagne
1	MEC33078BL	● Black
		1-gang single pole switched with USB Type-C - 18 W
		Fast charge feature: Power Delivery
1	MEC33093WH	○ White
1	MEC33093SL	● Dark Silver
1	MEC33093CH	● Champagne
1	MEC33093BL	● Black
		2-gang single pole switched with USB Type-A + Type-C - 3 A - 5 V~ - 15 W
1	MEC33090WH	○ White
1	MEC33090SL	● Dark Silver
1	MEC33090CH	● Champagne
1	MEC33090BL	● Black

Pack	Cat.Nos	British standard socket outlets - 13 A - 250 V~ with USB and microswitch
		1-gang single pole switch with 1 x USB Type-A 15 W and microswitch
1	MEC33096WHSG	○ White
1	MEC33096SLSG	● Dark Silver
1	MEC33096CHSG	● Champagne
1	MEC33096BLSG	● Black
		2-gang single pole switch with 2 x USB Type-A + Type-C 15 W and microswitch
1	MEC33092WHSG	○ White
1	MEC33092SLSG	● Dark Silver
1	MEC33092CHSG	● Champagne
1	MEC33092BLSG	● Black



MEC32042SL



MEC32044CH

Dimensions: 86 x 86 mm
Supplied with 2 screws M 3.5 for BS boxes
Supplied as complete product with protective film
All sockets integrate child protection

Pack	Cat.Nos	British standard socket outlets 15 A - 250 V~
		Conform to BS 546
		1-gang switched
10	MEC32042WH	○ White
10	MEC32042SL	● Dark Silver
10	MEC32042CH	● Champagne
10	MEC32042BL	● Black
		1-gang unswitched
1	MEC31043WH	○ White
1	MEC31043SL	● Dark Silver
1	MEC31043BL	● Black
		British standard socket outlets 5 A - 250 V~
		Conform to BS 546
		1-gang switched
10	MEC32044WH	○ White
10	MEC32044SL	● Dark Silver
10	MEC32044CH	● Champagne
10	MEC32044BL	● Black



MEC33083WH

Dimensions: 86 x 86 mm (1-gang) / 146 x 86 mm (2-gang)
Supplied with 2 screws M 3.5 for BS boxes
Supplied as complete product with protective film
All sockets integrate child protection

Pack	Cat.Nos	Multistandard switched socket outlets - 16 A - 250 V / 15 A - 127 V
		1-gang 2P+E
10	MEC32045WH	○ White
10	MEC32045SL	● Dark Silver
10	MEC32045CH	● Champagne
10	MEC32045BL	● Black
		2-gang 2P+E
5	MEC32046WH	○ White
5	MEC32046SL	● Dark Silver
5	MEC32046CH	● Champagne
5	MEC32046BL	● Black
		Multistandard socket outlets 16 A - 250 V~ / 15 A - 127 V~ with USB charger
		USB charger conform to IEC 62368-1
		1-gang 2P+E switched + USB Type-A - 3 A - 5 V~ - 15 W
		Consumption in passive mode < 0.08 W
1	MEC33081WH	○ White
1	MEC33081SL	● Dark Silver
1	MEC33081CH	● Champagne
1	MEC33081BL	● Black
		1-gang 2P+E switched + USB Type-C - 18 W
		Fast charge feature: Power Delivery
		Consumption in passive mode < 0.08 W
1	MEC33083WH	○ White
1	MEC33083SL	● Dark Silver
1	MEC33083CH	● Champagne
1	MEC33083BL	● Black
		2-gang 2 x 2P+E switched + USB Type-A + Type-C - 3 A - 5 V~ - 15 W
		Consumption in passive mode < 0.08 W
1	MEC33082WH	○ White
1	MEC33082SL	● Dark Silver
1	MEC33082CH	● Champagne
1	MEC33082BL	● Black
		2-gang 2 x 2P+E switched + USB Type-A + Type-C - 27 W
		Fast charge feature: Power Delivery
		Consumption in passive mode < 0.07 W
1	MEC33077WH	○ White
1	MEC33077SL	● Dark Silver
1	MEC33077CH	● Champagne
1	MEC33077BL	● Black

Obria™ - multistandard + Euro-US and German standard socket outlets



Obria™ cable outlets and fused connection unit



MEC32053SL



MEC32054CH

Dimensions: 86 x 86 mm (1-gang) / 146 x 86 mm (2-gang)
Supplied with 2 screws M 3.5 for BS boxes
Supplied as complete product with protective film
All sockets integrate child protection

Pack	Cat.Nos	Multistandard + Euro-US socket outlets - 16 A - 250 V~
10	MEC31051WH	1-gang unswitched ○ White ● Dark Silver ● Champagne ● Black
10	MEC31051SL	
10	MEC31051CH	
10	MEC31051BL	
10	MEC32053WH	1-gang switched ○ White ● Dark Silver ● Champagne ● Black
10	MEC32053SL	
10	MEC32053CH	
10	MEC32053BL	
10	MEC31052WH	2-gang unswitched ○ White ● Dark Silver ● Champagne ● Black
10	MEC31052SL	
10	MEC31052CH	
10	MEC31052BL	
5	MEC32054WH	2-gang switched ○ White ● Dark Silver ● Champagne ● Black
5	MEC32054SL	
5	MEC32054CH	
5	MEC32054BL	

Pack	Cat.Nos	Euro-US standard socket outlets 16 A - 250 V~
10	MEC31049WH	1-gang duplex 2P+E ○ White ● Dark Silver ● Champagne ● Black
10	MEC31049SL	
10	MEC31049CH	
10	MEC31049BL	
10	MEC31047WH	1-gang duplex 2 x 2P ○ White ● Dark Silver ● Champagne ● Black
10	MEC31047SL	
10	MEC31047CH	
10	MEC31047BL	
10	MEC32048WH	1-gang duplex switched 2P ○ White ● Dark Silver ● Champagne ● Black
10	MEC32048SL	
10	MEC32048CH	
10	MEC32048BL	

Pack	Cat.Nos	German standard socket outlets 16 A - 250 V~
10	MEC31050WH	1-gang 2P+E ○ White ● Dark Silver ● Champagne ● Black
10	MEC31050SL	
10	MEC31050CH	
10	MEC31050BL	



MEC35058BL



MEC35059WH



MEC62057CH

Dimensions: 86 x 86 mm (1-gang) / 146 x 86 mm (2-gang)
Supplied with 2 screws M 3.5 for BS boxes
Supplied as complete product with protective film

Pack	Cat.Nos	Cable outlets
10	MEC35058WH	20 A ○ White ● Dark Silver ● Champagne ● Black
10	MEC35058SL	
10	MEC35058CH	
10	MEC35058BL	
5	MEC35059WH	45 A ○ White ● Dark Silver ● Champagne ● Black
5	MEC35059SL	
5	MEC35059CH	
5	MEC35059BL	
10	MEC62055WH	13 A fused connection units Conform to BS 1363- 4 Unswitched + Cord outlet ○ White ● Dark Silver ● Champagne ● Black
10	MEC62055SL	
10	MEC62055CH	
10	MEC62055BL	
5	MEC62056WH	Switched ○ White ● Dark Silver ● Champagne ● Black
5	MEC62056SL	
5	MEC62056CH	
5	MEC62056BL	
5	MEC62057WH	Switched with red LED power indicator ○ White ● Dark Silver ● Champagne ● Black
5	MEC62057SL	
5	MEC62057CH	
5	MEC62057BL	



MEC27075WH



MEC36019SL



MEC27072SL



MEC27007SL

Dimensions: 86 x 86 mm (1-gang and 2-gang) / 86 x 150 (2-gang shaver sockets)
 Supplied with 2 screws M 3.5 for BS boxes
 Supplied as complete product with protective film

Pack	Cat.Nos	RFID key card switches
		For energizing a circuit for example meeting room, office, hotel room, etc. Works only with ISO type contactless key card or other ISO type 13.56 MHz key card Time-delay of approx. 30 sec. after card removal Lighting of the slot by LED
1	MEC27075WH	<div> <div>12 V</div> <div> <div>○ White</div> <div>● Dark Silver</div> <div>● Champagne</div> <div>● Black</div> </div> </div>
1	MEC27075SL	
1	MEC27075CH	
1	MEC27075BL	
1	MEC27016WH	<div> <div>230 V</div> <div> <div>○ White</div> <div>● Dark Silver</div> <div>● Champagne</div> <div>● Black</div> </div> </div>
1	MEC27016SL	
1	MEC27016CH	
1	MEC27016BL	
10	0 767 11	Key card For RFID key card switches MIFARE contactless badge card ISO format (50 x 80 mm) Chip: 13.56 MHz Standard 1 KB memory
		Shaver sockets Conform to BS EN 61558-2-5, IP24 For use with European, British, American, Australian 2-pin plugs Screwless live and neutral terminals Double wound isolating transformer Automatic self-resetting overload feature Plug insertion operates micro-switch which energises transformer For flush-mounting boxes, use BS 2-gang box depth 48 mm Power supply: 230 V - 50/60 Hz
1	MEC36019WH	<div> <div>1-gang</div> <div> <div>○ White</div> <div>● Dark Silver</div> <div>● Champagne</div> <div>● Black</div> </div> </div>
1	MEC36019SL	
1	MEC36019CH	
1	MEC36019BL	

Pack	Cat.Nos	Shaver sockets (continued)
		2-gang <div> <div>○ White</div> <div>● Dark Silver</div> <div>● Champagne</div> <div>● Black</div> </div>
1	MEC36074WH	
1	MEC36074SL	
1	MEC36074CH	
1	MEC36074BL	
		Hotel bedroom control units Enable the resident to inform hotel staff of the room status. Supplied with LED lamp
		1-gang - Do not disturb / Make up room and bell push-button - 230 V LED Installed in the corridor, displays calls Indicator lamp and bell push Supplied with LED <div> <div>○ White</div> <div>● Dark Silver</div> <div>● Champagne</div> <div>● Black</div> </div>
10	MEC27072WH	
10	MEC27072SL	
10	MEC27072CH	
10	MEC27072BL	
		2-gang - Do not disturb / Make up room - 230 V LED Installed in the guest room Allows the user to select the desired setting <div> <div>○ White</div> <div>● Dark Silver</div> <div>● Champagne</div> <div>● Black</div> </div>
10	MEC27007WH	
10	MEC27007SL	
10	MEC27007CH	
10	MEC27007BL	

Obria™

Keystone adaptators, Arteor adaptators and blanking plates



MEC17060WH



MEC17061CH



MEC15062BL



6 176 36 + MEC33093WH

Dimensions: 86 x 86 mm (1-gang) / 146 x 86 mm (2-gang)
Supplied with 2 screws M 3.5 for BS boxes
Supplied as complete product with protective film

Pack	Cat.Nos	Keystone adaptors
10	MEC17064WH	Single <ul style="list-style-type: none"> ○ White ● Dark Silver ● Champagne ● Black
10	MEC17064SL	
10	MEC17064CH	
10	MEC17064BL	
10	MEC17065WH	Double <ul style="list-style-type: none"> ○ White ● Dark Silver ● Champagne ● Black
10	MEC17065SL	
10	MEC17065CH	
10	MEC17065BL	
		Arteor adaptors Allow the integration of 2-module Arteor mechanisms such as reading lights, USB chargers, South African standard sockets, etc.
10	MEC17060WH	1-gang - 2 modules <ul style="list-style-type: none"> ○ White ● Dark Silver ● Champagne ● Black
10	MEC17060SL	
10	MEC17060CH	
10	MEC17060BL	
10	MEC17061WH	2-gang - 2 modules <ul style="list-style-type: none"> ○ White ● Dark Silver ● Champagne ● Black
10	MEC17061SL	
10	MEC17061CH	
10	MEC17061BL	

Pack	Cat.Nos	Blanking plates
10	MEC15062WH	1-gang <ul style="list-style-type: none"> ○ White ● Dark Silver ● Champagne ● Black
10	MEC15062SL	
10	MEC15062CH	
10	MEC15062BL	
4	6 176 36	Fixing accessories Splash-proof cover Mainly for socket protection IP 55 with or without plug engaged Space inside : 86 x 86 mm External dimensions : 129,2 x 107,2 x 54,1 mm <ul style="list-style-type: none"> ● Mist grey



HOMES



OFFICES



HOTELS

World Headquarters

and International Department

87045 Limoges Cedex - France

Tel: +33 (0) 5 55 06 87 87

FOLLOW US ON



legrand.com



youtube.com/user/legrand



twitter.com/Legrand



linkedin.com/company/legrand

PLEASE UPDATE WITH YOUR
LOCAL SOCIAL MEDIA

